




Project: West Shore Drive Ditch cleaning
Subject: Dirt Removal Calculations
Date: 12/17/18 By: MPC SEH #: 135501
Checked by: _____ Date: _____ Office: _____ File #: _____
Sheet No: _____ Of: _____

Assume average 1' depth removal
4 cubic feet per foot of Ditch
 $4 \times 190 = 760 \text{ cuft}$
 $= 28 \text{ CY}$

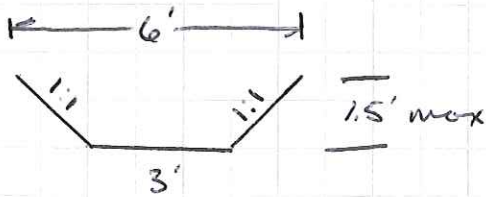

West
Shore
Drive

892.0
891.5
891.0
890.5

