


NOTE: ADDITIONAL POST DEPTH OR TIE BACKS MAY BE REQUIRED IN UNSTABLE SOILS

GENERAL NOTES
DETAIL OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE SPECIFICATIONS.
WHEN POSSIBLE THE SILT FENCE SHOULD BE CONSTRUCTED IN AN ARC OR HORSESHOE SHAPE, WITH THE ENDS POINTING UPSLOPE TO MAXIMIZE BOTH STRENGTH AND EFFECTIVENESS.
① HORIZONTAL BRACE WITH 2" x 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS AS DIRECTED BY THE ENGINEER.
② TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" x 1 1/8" OF OAK OR HICKORY.

SILT FENCE
(NOT TO SCALE)

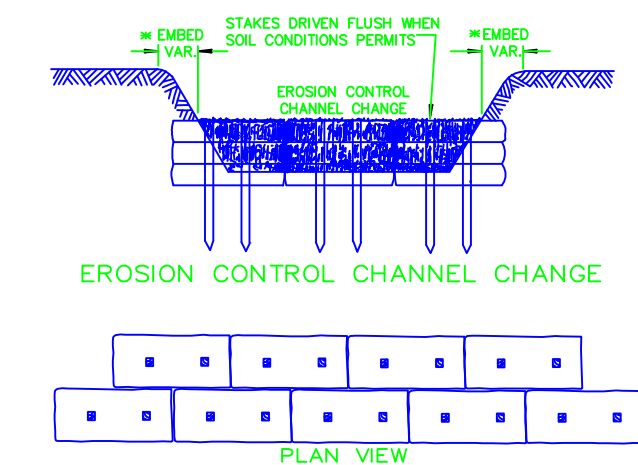

GENERAL NOTES
DETAILS OF CONSTRUCTION MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.
BALES SHALL BE PLACED END TO END OR OVERLAPPING AT RIGHT ANGLES TO THE DIRECTION OF FLOW AND FAR ENOUGH UP THE SIDES OF THE DITCH TO PREVENT ERODING AROUND ENDS.
STAKES TO BE BATTERED IN OPPOSITE DIRECTIONS.

EROSION BALES
(NOT TO SCALE)

FIELD BOOK	DRWN. BY	CHECKED	REVISION	DATE	REMARKS	REVISION	DATE	REMARKS
	Gwoo	JMD						



400 VIKING DR.
P.O. BOX 379
REEDSBURG, WI 53959
608-524-6468

JOB NUMBER	FILE NUMBER	DATE
36034265	11DL-1-1	06/2004

NAGAWICKA LAKE
DETAILS
DELAFIELD, WISCONSIN